


Screw Ring Gauges Metric Coarse

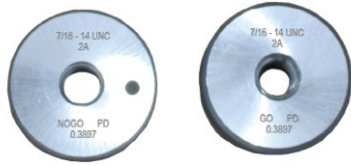

Screw Ring Gauges:

ISO Threads
 6g Tolerance
 Knurled outer surface
 GO: Thick body
 NO-GO Thin body +Surface hole

CODE NO.	SIZE	CLASS	TYPE	PITCH DIA.
53-850-030	M3 x 0.5	ISO 6g	GO PD	2.655mm
53-851-030	M3 x 0.5	ISO 6g	NO GO PD	2.580mm
53-850-040	M4 x 0.7	ISO 6g	GO PD	3.523mm
53-851-040	M4 x 0.7	ISO 6g	NO GO PD	3.433mm
53-850-050	M5 x 0.8	ISO 6g	GO PD	4.456mm
53-851-050	M5 x 0.8	ISO 6g	NO GO PD	4.361mm
53-850-060	M6 x 1.0	ISO 6g	GO PD	5.324mm
53-851-060	M6 x 1.0	ISO 6g	NO GO PD	5.212mm
53-850-080	M8 x 1.25	ISO 6g	GO PD	7.160mm
53-851-080	M8 x 1.25	ISO 6g	NO GO PD	7.042mm
53-850-100	M10 x 1.5	ISO 6g	GO PD	8.994mm
53-851-100	M10 x 1.5	ISO 6g	NO GO PD	8.862mm
53-850-120	M12 x 1.75	ISO 6g	GO PD	10.829mm
53-851-120	M12 x 1.75	ISO 6g	NO GO PD	10.679mm
53-850-140	M14 x 2.0	ISO 6g	GO PD	12.663mm
53-851-140	M14 x 2.0	ISO 6g	NO GO PD	12.503mm
53-850-160	M16 x 2.0	ISO 6g	GO PD	14.663mm
53-851-160	M16 x 2.0	ISO 6g	NO GO PD	14.503mm
53-850-200	M20 x 2.5	ISO 6g	GO PD	18.334mm
53-851-200	M20 x 2.5	ISO 6g	NO GO PD	18.164mm

Packed Weight and Dimensions

Code	Type	Weight g	W mm	H mm	L mm
53-850-030	GO PD	19	33	14	33
53-850-040	GO PD	16	33	14	33
53-850-050	GO PD	17	33	14	33
53-850-060	GO PD	55	44	19	44
53-850-080	GO PD	77	44	19	44
53-850-100	GO PD	77	44	19	44
53-850-120	GO PD	110	57	22	57
53-850-140	GO PD	83	57	22	57
53-850-160	GO PD	187	57	22	57
53-850-200	GO PD	216	57	22	57
53-850-SET	GO PD	250	47	140	173
53-851-030	NO GO PD	19	33	14	33
53-851-040	NO GO PD	16	33	14	33
53-851-050	NO GO PD	17	33	14	33
53-851-060	NO GO PD	36	41	19	41
53-851-080	NO GO PD	75	41	19	41
53-851-100	NO GO PD	51	44	19	44
53-851-120	NO GO PD	110	57	22	57
53-851-140	NO GO PD	88	59	22	57
53-851-160	NO GO PD	187	57	22	57
53-851-200	NO GO PD	216	57	22	57