


O-Ring Burr


	<p>Removes burrs from internal “O” Ring grooves Range: 0-3mm groove width</p>
---	---

Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
NG 1100	“O” Ring Burr	50	31	31	176

	<p>Instructions</p> <p>Do not use heavy pressure when deburring as this will cause the blade to dig into the material and give an uneven finish Use light and even pressure which will allow the blade and handle to work together to remove the burr and leave a smooth finish on the component</p> <p>Blades should be handled carefully as they are sharp and can cut Blades can break causing flying objects Sharp edges and flying objects can cause injury Users and bystanders should wear protective safety glasses Do not pry or bend blades Keep blades and sharp tools away from children Do not regrind blades as this will weaken the blade and cause breakage and possible injury</p> <p>All Noga products meet the strict requirements of ISO 9001 and ISO 14001</p>
--	--

NG-1 Handle

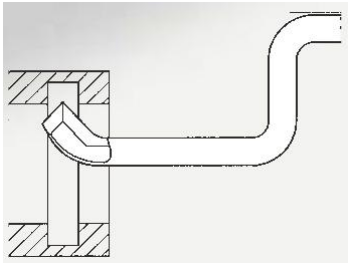

	<p>NG-1 Handle accepts all “S” type Blades Ergonomic soft grip, acetyl and rubber construction Removable end cap for blade storage 125mm long x 28mm maximum diameter Blades are secured by pulling back the front locking mechanism and are free to rotate</p>
---	---

Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
NG-1 Handle	NG1000	45	32	32	153

O-Ring Burr

BO 1000 "O" Ring Blade

		<p>Replacement Blade for "O" Ring Burr (NG 1100) Included Blade Angle: 110° Maximum Groove width 3mm Minimum Hole entry 8mm diameter Blade shank diameter 3.2mm Blade material: HSS M2 Blade hardness: 62-64 HRC Used with NG-1 Handle or S Holder with NG-3 Handle</p>
--	---	--

Packed Weight and Dimensions

Code	Description	Pack Quantity	Weight g	W mm	H mm	L mm
BO1000	Replacement Blade for O- Ring Burr	10	45	36	21	70