

DATA - SHEET 1051

No. 1051

Page. 1 of 1

Date. 16 / 12 / 2005

JOBBER DRILLS QUICK SPIRAL


DIN 338 RW / BS 328 / ISO 235

Application:- For drilling Alluminium, Magnesium, Copper and other light alloys.

Flute Geometry:- Quick Helix, Right Hand Spiral.

Point Angle:- 130°

Surface Treatment:- Bright.

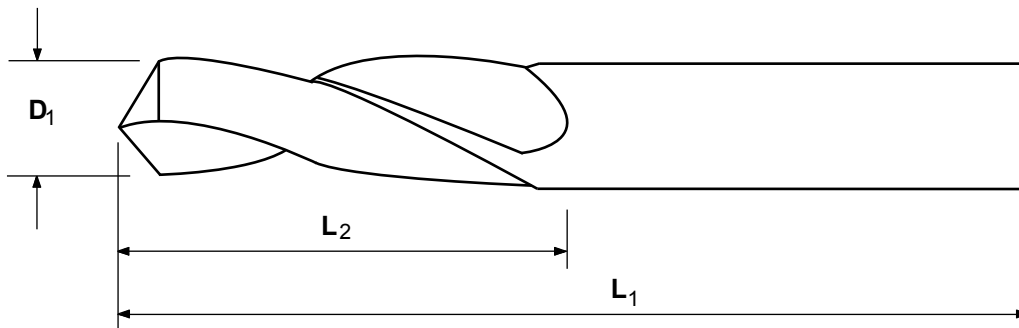

Linear Code	D1 mm	L2 mm	L1 mm
20-696-010	1.0	12	34
20-696-015	1.5	18	40
20-696-020	2.0	24	49
20-696-025	2.5	30	57
20-696-030	3.0	33	61
20-696-033	3.3	36	65
20-696-035	3.5	39	70
20-696-040	4.0	43	75
20-696-042	4.2	43	75
20-696-045	4.5	47	80
20-696-050	5.0	52	86
20-696-055	5.5	57	93
20-696-060	6.0	57	93
20-696-065	6.5	63	101
20-696-068	6.8	69	109
20-696-070	7.0	69	109
20-696-075	7.5	69	109
20-696-080	8.0	75	117
20-696-085	8.5	75	117
20-696-090	9.0	81	125
20-696-095	9.5	81	125
20-696-100	10.0	87	133
20-696-102	10.2	87	133
20-696-110	11.0	94	142
20-696-120	12.0	101	151
20-696-130	13.0	101	151