

Datasheet



PLATINUM HOLDERS

- Due to its stability and ease of use, NOGA Platinum Articulated Holders will be the most coveted in the industry.
- 3 different sizes of articulated arms are available for a wide range of applications.
- Central locking mechanism with NOGA designed spring loaded bearing.
- Anti-rust black finished arms.
- The NEW design of Noga arms are most flexible for your positioning requirements.
- Instant locking in any position.
- New modified knob with Noga logo.



Top Fine Adjustment

The New fine adjustment has been upgraded by adding another hermetic lock preventing it from moving while working/zero setting.

Fine adjustment on top with universal swivel clamp.


Holds 6mm, 8mm, 3/8" and dovetail.

Powerful Magnet Base

Designed and upgraded front panel with a strong frame that stabilizes the ON/OFF switch as it moves.

The corner thread position for the arm enables a deeper thread which prevents friction between the arm and internal core.

Magnet range of 500N (NF Model) - 1000N (DG, MG Models)

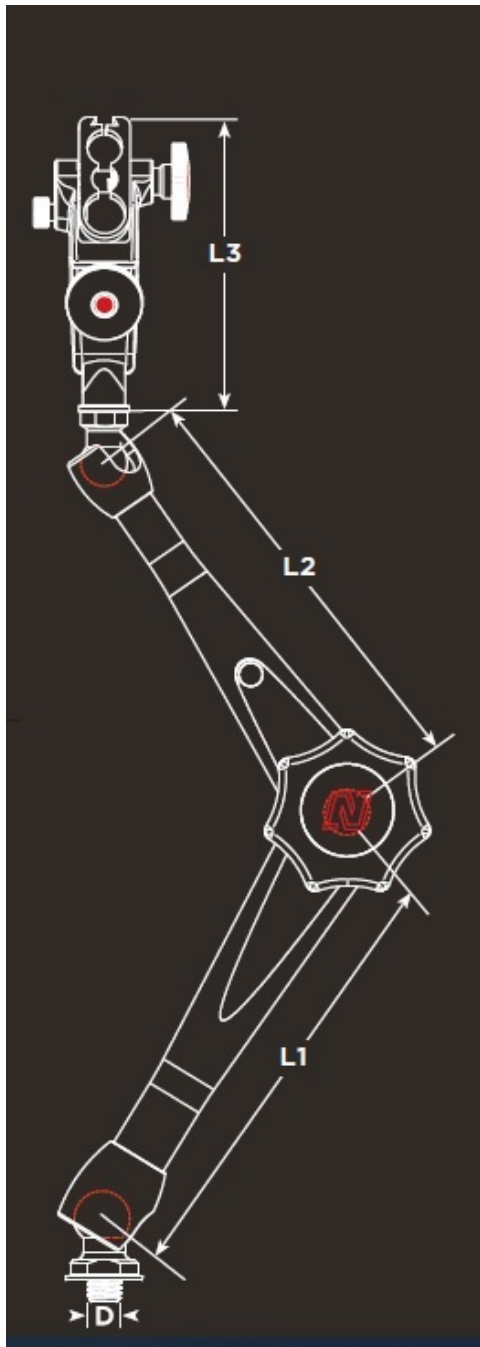

Order No.	HOLDER		ARMS		FAT	TOTAL
	Bottom Thread	Weight	Bottom Arm	Top Arm	Length	Length
	D	[Kg]	L1	L2	L3	L1+L2+L3
NF3200	Ext. M5	0.72	56	51	71	178
NF3100	Ext. M5	0.32	56	51	71	178
DG3200	Ext. M8	1.65	110	101	71	282
DG3100	Ext. M8	0.35	110	101	71	282
MG3200	Ext. M8	2.20	133	113	71	317
MG3100	Ext. M8	0.90	133	113	71	317

Order No.	CLAMP	MAGNET			
		Force	Dimension		
		[N]	W	L	H
NF3200	6,8,3/8", DOVE TAIL	500	40	40	40
NF3100	6,8,3/8", DOVE TAIL	-	-	-	-
DG3200	6,8,3/8", DOVE TAIL	1000	50	75	55
DG3100	6,8,3/8", DOVE TAIL	-	-	-	-
MG3200	6,8,3/8", DOVE TAIL	1000	50	75	55
MG3100	6,8,3/8", DOVE TAIL	-	-	-	-

All measurements are in mm unless otherwise mentioned