



Taps NPT Straight Flute

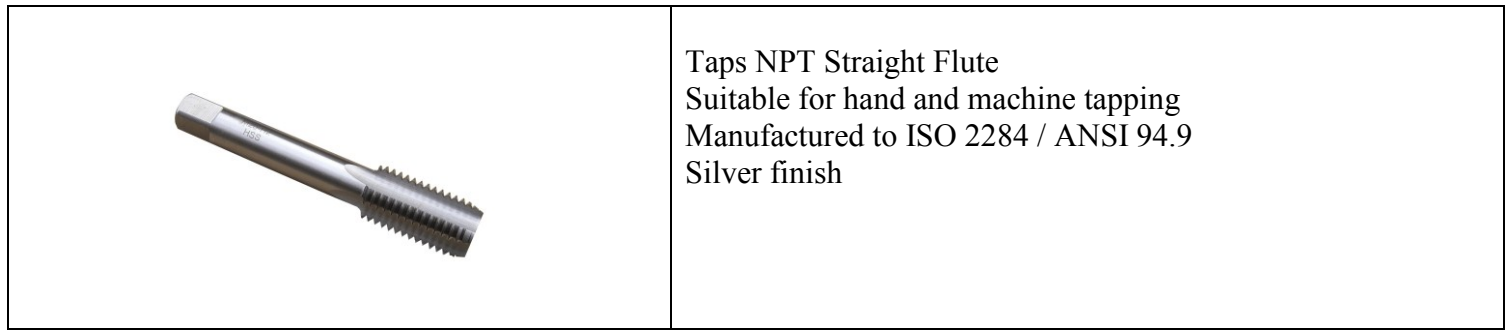

Taps NPT Straight Flute
 Suitable for hand and machine tapping
 Manufactured to ISO 2284 / ANSI 94.9
 Silver finish

Code	Size	d1 mm	L1 mm	L2 mm	L mm	a mm
21-508-901	1/16					
21-508-902	1/8	8	15	7.9	59	6.3
21-508-903	1/4	10	19	11.7	67	8
21-508-904	3/8	12.5	21	11.5	75	10
21-508-905	1/2	16	26	14.7	87	12.5
21-508-906	3/4	20	28	14.4	96	16
21-508-907	1	25	33	17.2	109	20

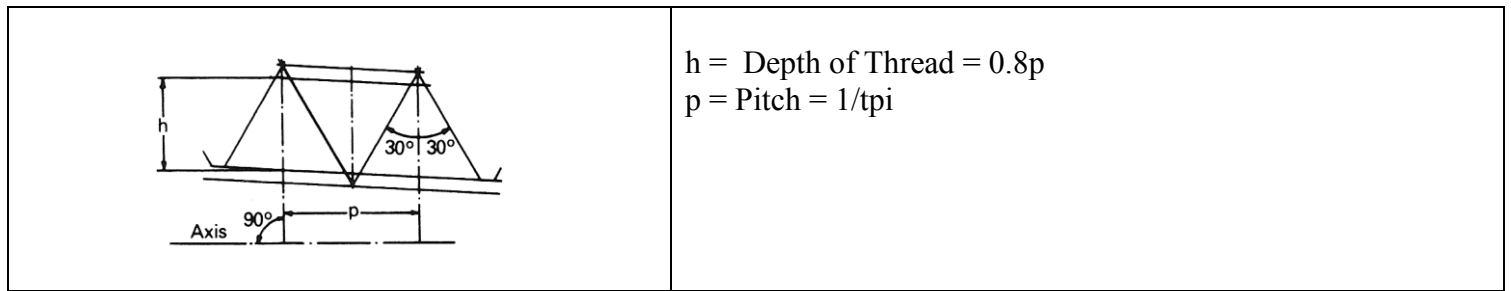

Set Code	Size	Pitch	Outside Dia. of Pipe	Effective Dia. at Small End of External Thread	Effective Dia. at Large End of Internal Thread	Basic Depth of Thread	Tapping Drill
	Inch	TPI	Inch	Inch	Inch	Inch	mm
21-508-901	1/16	27	0.3125	0.2712	0.2812	0.0296	6.3
21-508-902	1/8	27	0.405	0.3635	0.3736	0.0296	8.7
21-508-903	1/4	18	0.540	0.4774	0.4916	0.0444	11.1
21-508-904	3/8	18	0.675	0.6120	0.6270	0.0444	14.5
21-508-905	1/2	14	0.840	0.7584	0.7784	0.0571	18.0
21-508-906	3/4	14	1.050	0.9677	0.9889	0.0571	23.25
21-508-907	1	11	1.315	1.2136	1.2386	0.0696	29.0

Packed Weight and Dimensions

Set Code	Size Inch	Pitch TPI	Weight g	W mm	H mm	L mm
21-508-901	1/16	27	22	19	19	67
21-508-902	1/8	27	25	19	19	69
21-508-903	1/4	18	46	19	19	69
21-508-904	3/8	18	73	22	22	80
21-508-905	1/2	14	130	22	22	114
21-508-906	3/4	14	229	30	30	104
21-508-907	1	11	395	40	40	130